
DPA65R-BU6DB (Type 17 RET Configuration Only)

Top of antenna Viewed from rear



RET placement as viewed from rear of antenna

Top of antenna

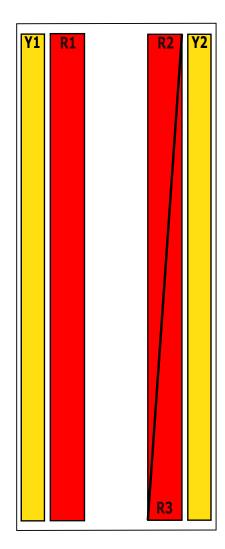

717-728 MHz (700 RET) Ports 5 & 6

Array	Ports	Freq (MHz)	Ports controlled by dedicated RET	AISG RET UID
R1	1, 2	698-896	1, 2, 3, 4	ClxxxxxMM.1
R2	3, 4	758-798		
R3	5, 6	717-728	5, 6	CIxxxxxMM.3
Y1	7, 8	1695-2400	7, 8, 9, 10	ClxxxxxMM.2
Y2	9, 10	1695-2400		

